

# The Compute : Communicate Ratio




**Oregon State**  
University  
**Mike Bailey**

mjb@cs.oregonstate.edu



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/)

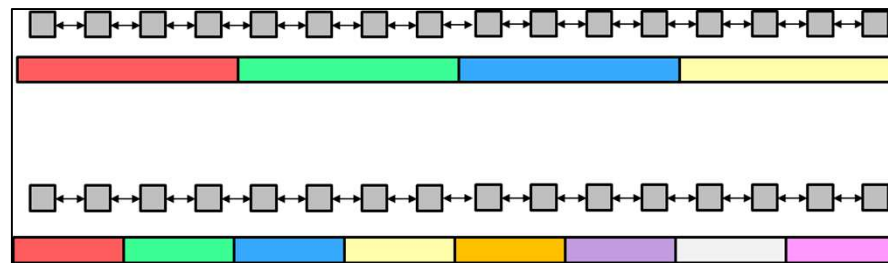


compute\_communicate\_ratio.pptx

mjb – June 13, 2022

## 1D Compute-to-Communicate Ratio

2

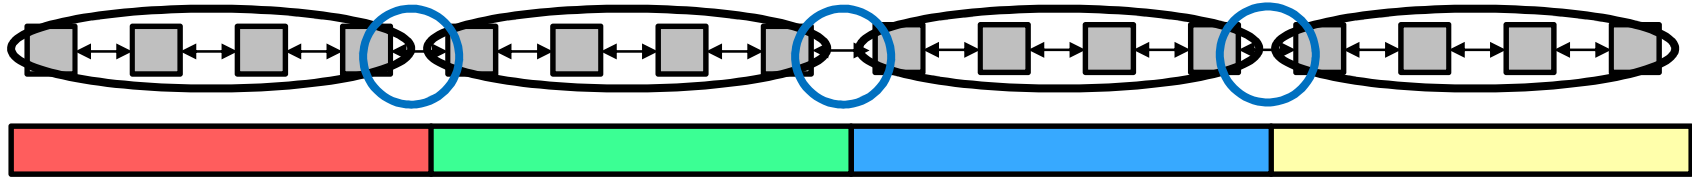

**Intracore** computing




**Intercore** communication

**Compute : Communicate ratio =  $N : 2$**


where  $N$  is the number of compute cells per core

In the above drawing, Compute : Communicate is 4 : 2

## How do more Cores Interact with the Compute-to-Communicate Ratio?

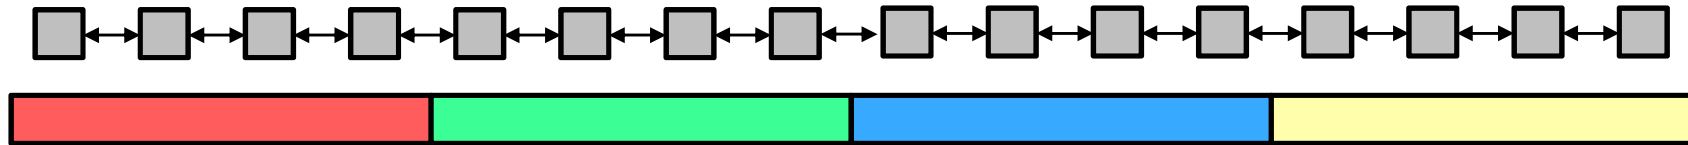

In this case, with 4 cores, Compute : Communicate = 4 : 2

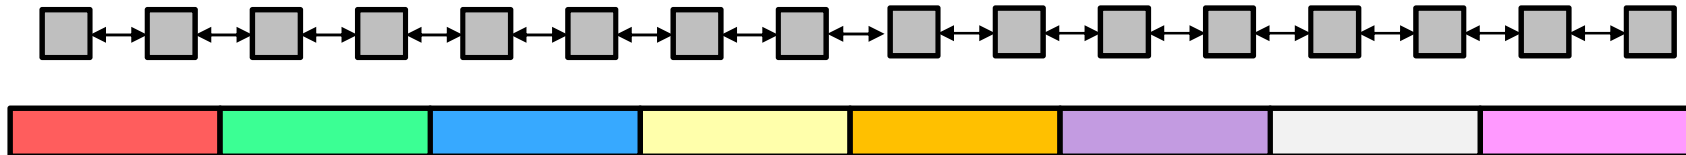

In this case, with 8 cores, Compute : Communicate = 2 : 2


Think of it as a *Goldilocks and the Three Bears* sort of thing. :-)

Too little *Compute : Communicate* and you are spending all your time sharing data values across threads and doing too little computing

Too much *Compute : Communicate* and you are not spreading out your problem among enough threads to get good parallelism.


# Performance as a Function of Number of MPI Processors

4

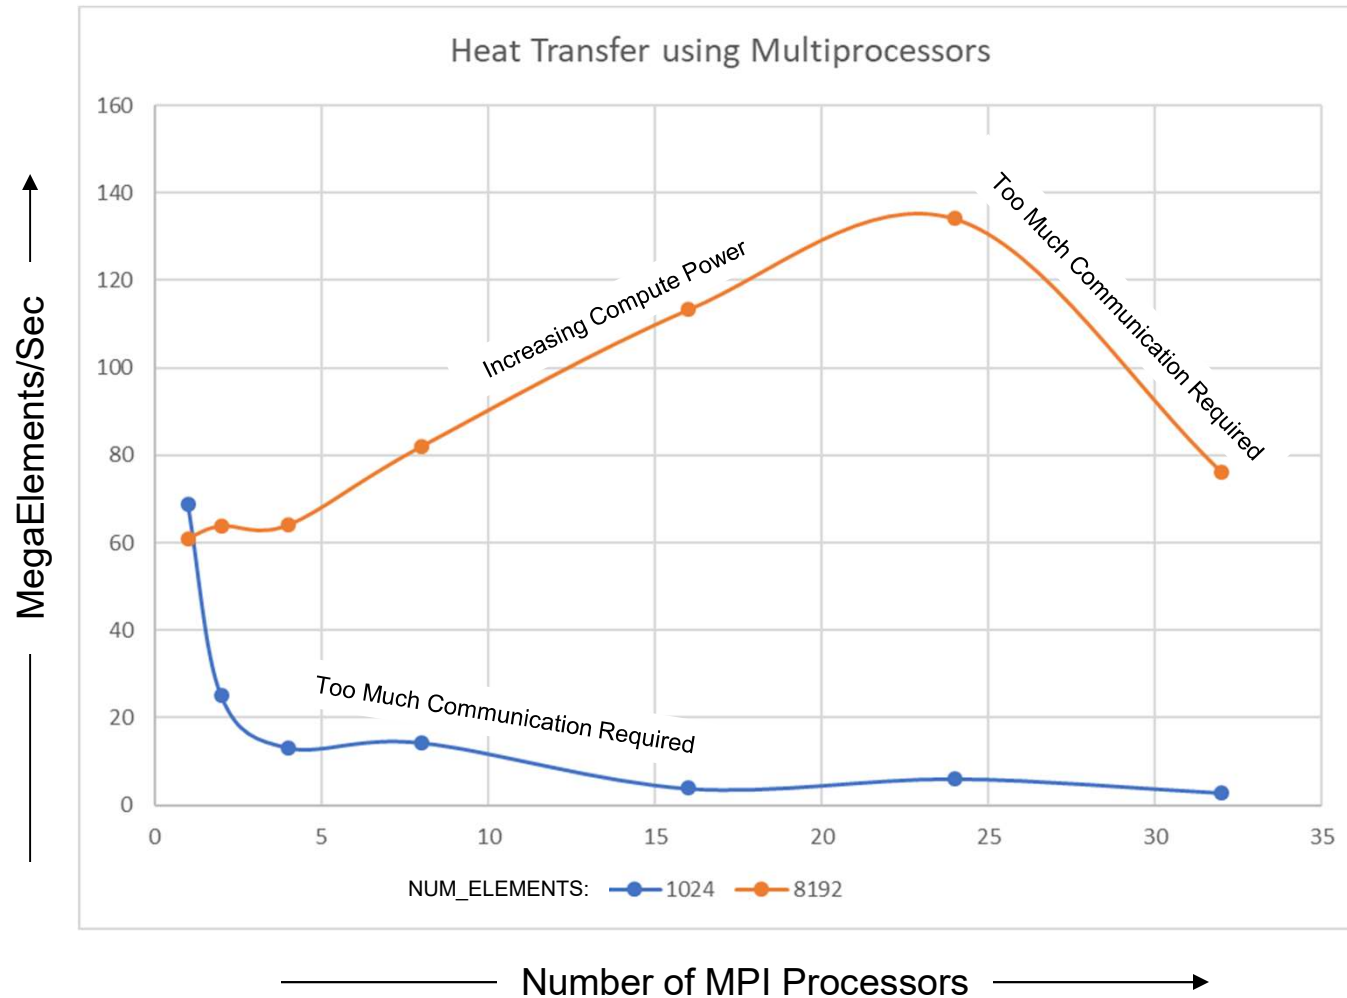


## Performance as a Function of NUM\_ELEMENTS

5

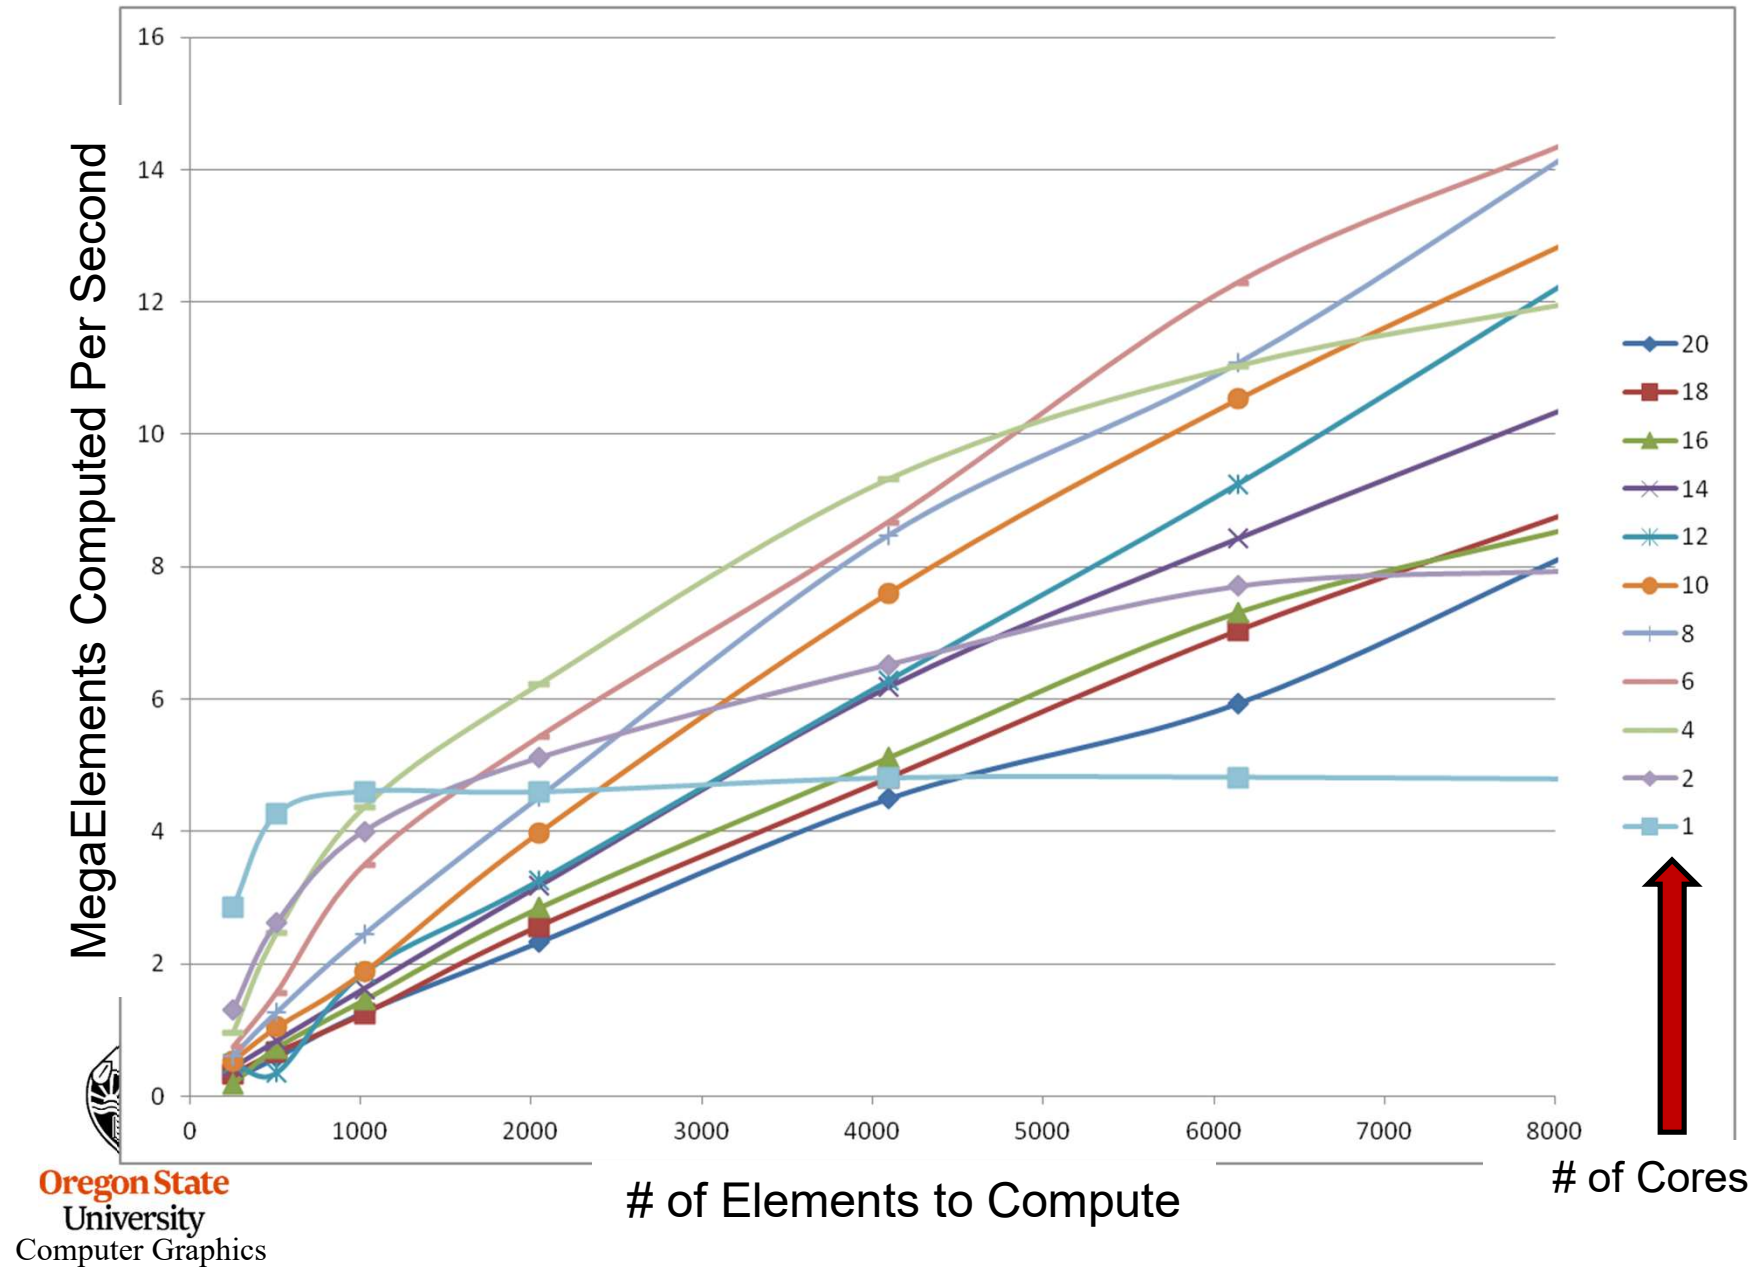

# Performance as a Function of Number of Cores

6

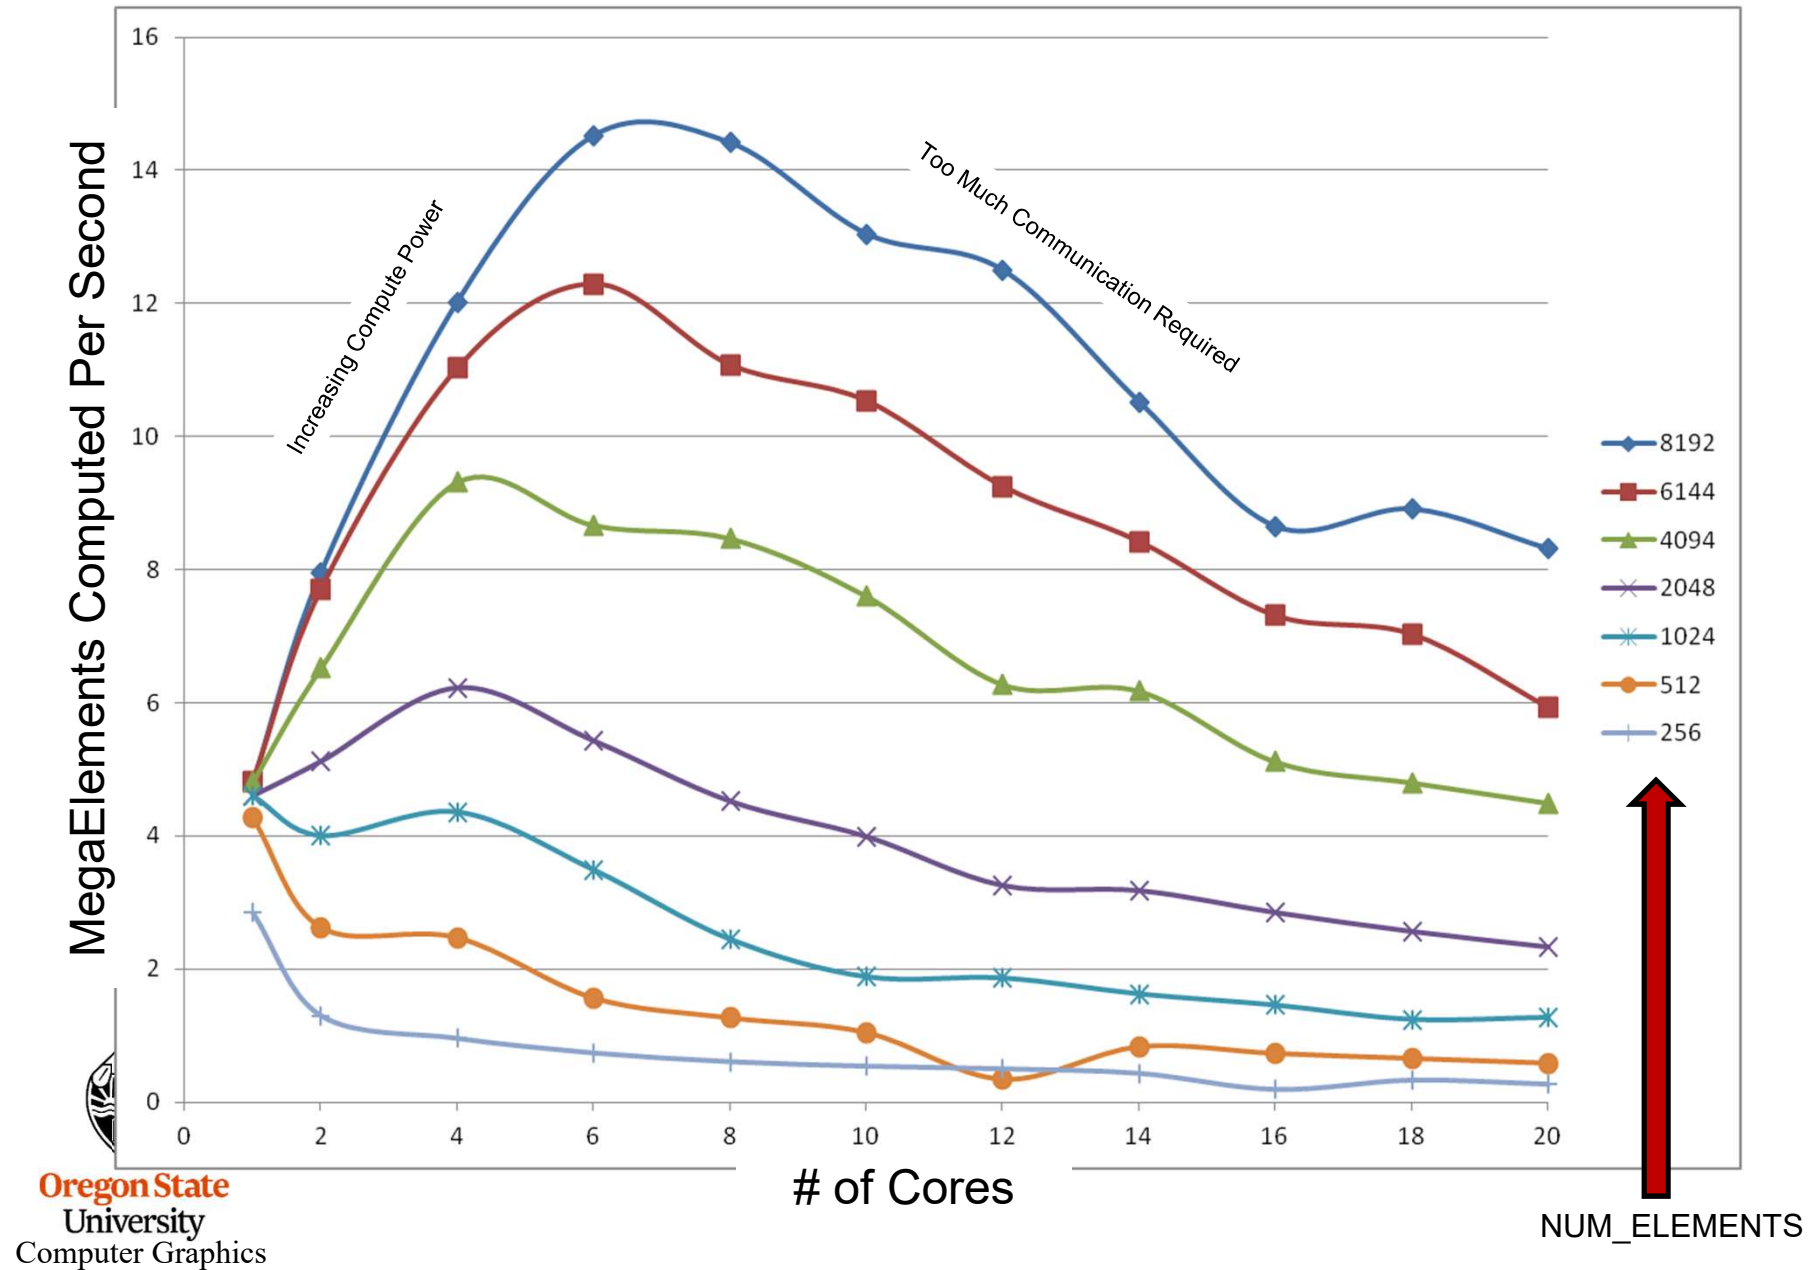


## 2D Heat Transfer Equation

7

$$\rho C \frac{\partial T}{\partial t} = k \left( \frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} \right)$$


$$\Delta T_{i,j} = \left( \frac{k}{\rho C} \right) \left( \frac{T_{i-1,j} - 2T_{i,j} + T_{i+1,j}}{(\Delta x)^2} + \frac{T_{i,j-1} - 2T_{i,j} + T_{i,j+1}}{(\Delta y)^2} \right) \Delta t$$

$$\frac{\Delta T}{\Delta t} = \frac{k}{\rho C} \left( \frac{\Delta^2 T}{\Delta x^2} + \frac{\Delta^2 T}{\Delta y^2} \right)$$

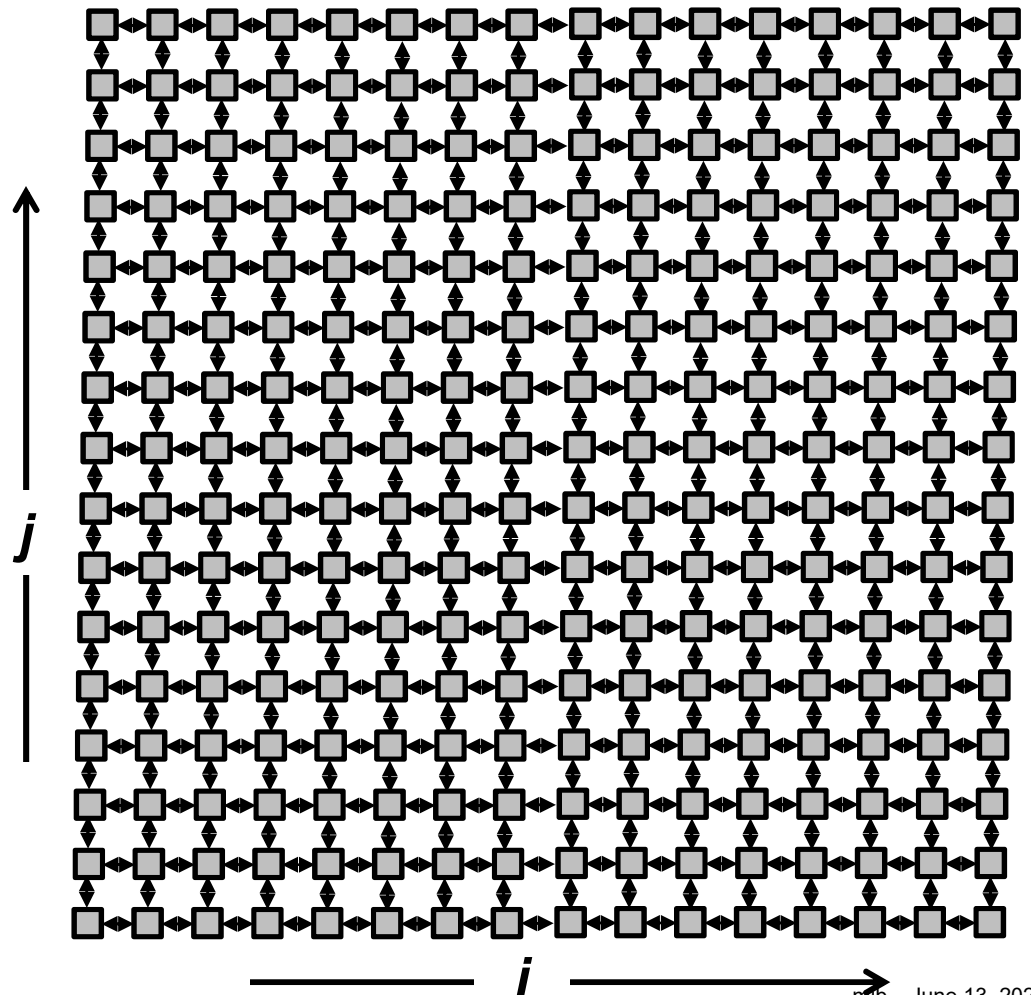

## 2D Compute-to-Communicate Ratio

8

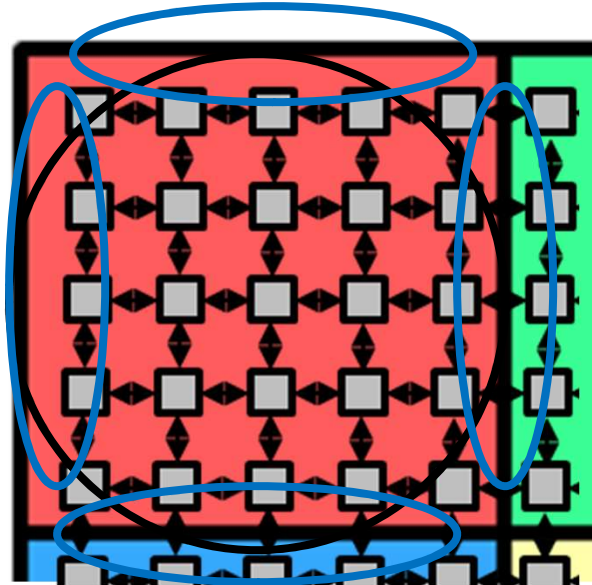

Intracore computing

Intercore communication

$$\text{Compute : Communicate ratio} = N^2 : 4N = N : 4$$

where  $N$  is the dimension of compute nodes per core



**The 2D Compute : Communicate ratio is sometimes referred to as**  
***Area-to-Perimeter***




# 3D Heat Transfer Equation

9

$$\rho C \frac{\partial T}{\partial t} = k \left( \frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} + \frac{\partial^2 T}{\partial z^2} \right)$$

$$\Delta T_{i,j,k} = \left( \frac{k}{\rho C} \right) \left( \frac{T_{i-1,j,k} - 2T_{i,j,k} + T_{i+1,j,k}}{(\Delta x)^2} + \frac{T_{i,j-1,k} - 2T_{i,j,k} + T_{i,j+1,k}}{(\Delta y)^2} + \frac{T_{i,j,k-1} - 2T_{i,j,k} + T_{i,j,k+1}}{(\Delta z)^2} \right) \Delta t$$

$$\frac{\Delta T}{\Delta t} = \frac{k}{\rho C} \left( \frac{\Delta^2 T}{\Delta x^2} + \frac{\Delta^2 T}{\Delta y^2} + \frac{\Delta^2 T}{\Delta z^2} \right)$$

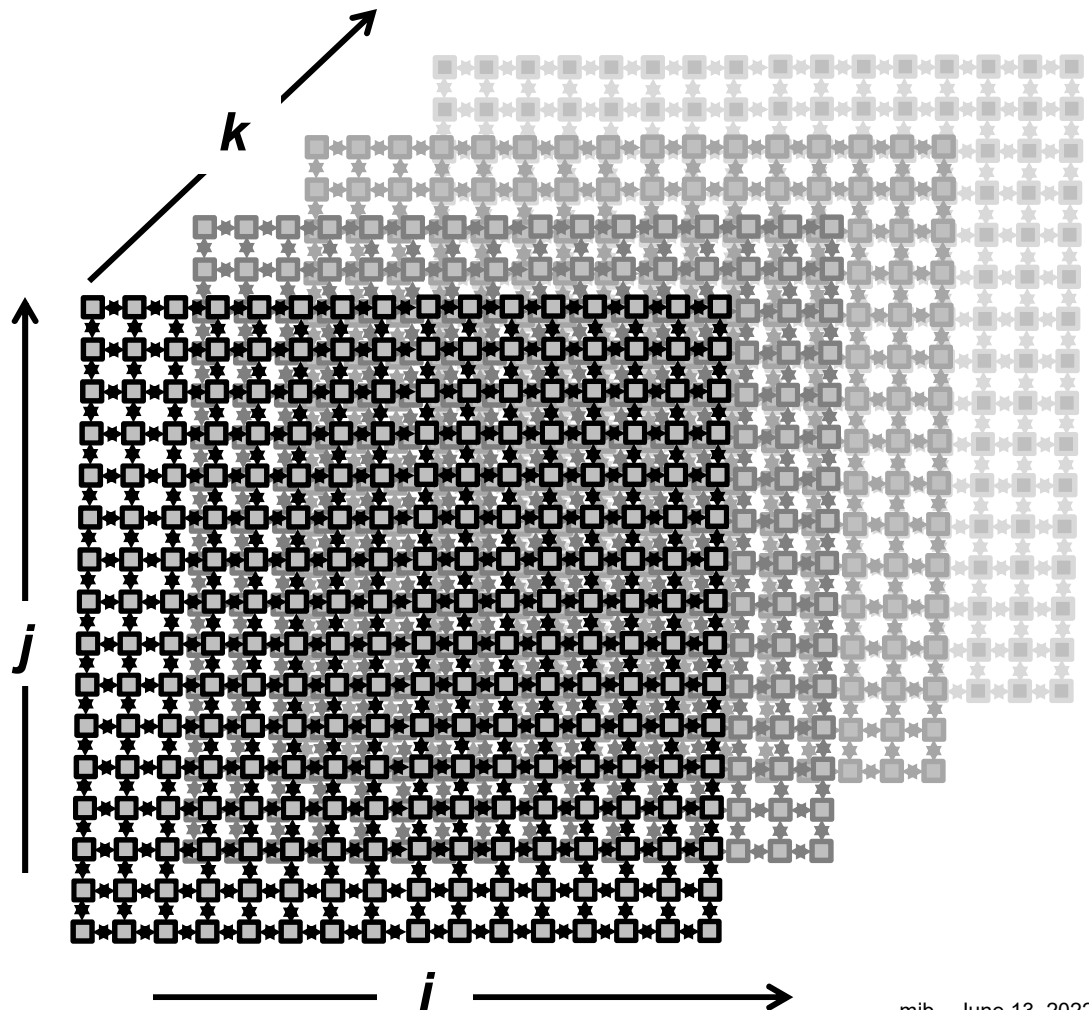

## 3D Compute-to-Communicate Ratio

10

**Compute : Communicate ratio =  $N^3 : 6N^2 = N : 6$**

where N is the dimension of compute nodes per core

**In 3D the Compute : Communicate ratio is sometimes referred to as  
*Volume-to-Surface***