


1

Simple Keytime Animation for CS 450/550



Oregon State
University


Mike Bailey

mjb@cs.oregonstate.edu



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](#)


Oregon State
University
Computer Graphics

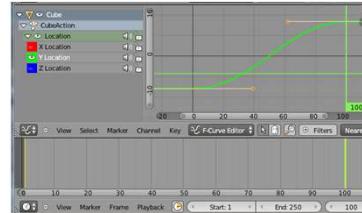

mjb – September 22, 2023

1

2

Approaches to Animation



1. Motion Capture ("MoCap")
2. Using the laws of physics ($F=ma$)
3. Using functional (target-driven) animation
4. Using keyframing

We'll talk more about these
in the Animation notes!


Oregon State
University
Computer Graphics

mjb – September 22, 2023

2

Keyframing

3

Keyframing involves creating certain *key* positions for the objects in the scene, and then the program later interpolating the animation frames *in between* the key frames.

In hand-drawn animation, the key frames are created by the senior animators, and the in-between frames are developed by the junior animators.

In our case, you are going to be the senior animator, and the computer will do the in-betweening.




mjb – September 22, 2023

3

The General Idea is to Interpolate the In-between Frames from the Smooth Curves Fit through the Key Frames

4

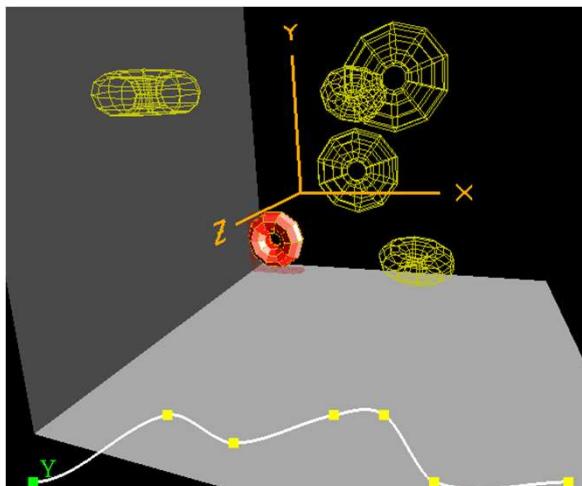

To make this simple to use, our goal is to just specify the keyframe *values*, not the *slopes*. We will let the computer compute the slopes for us, which will then let the in-between frames be computed.


mjb – September 22, 2023

4

**Many Professional Animation Packages Make You Sculpt the Slopes
(but we won't . . .)**

5


Blender:

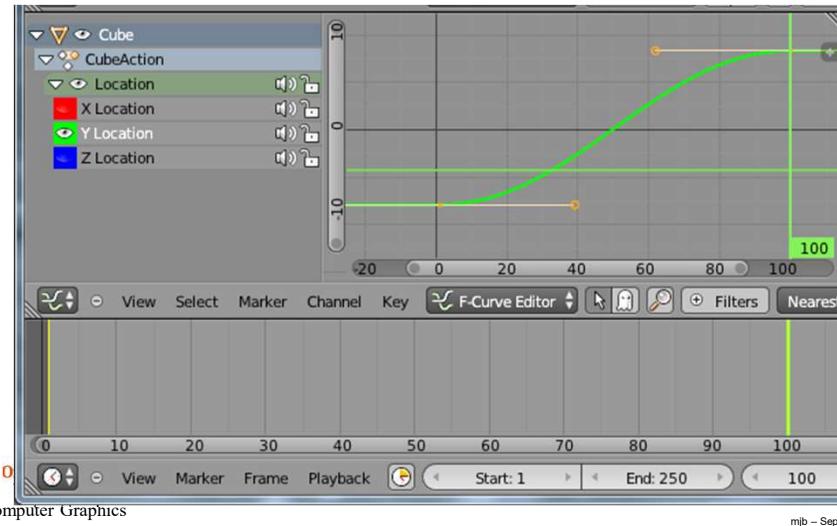

5

The “Y vs. Frame” Curve Looks Like This

6

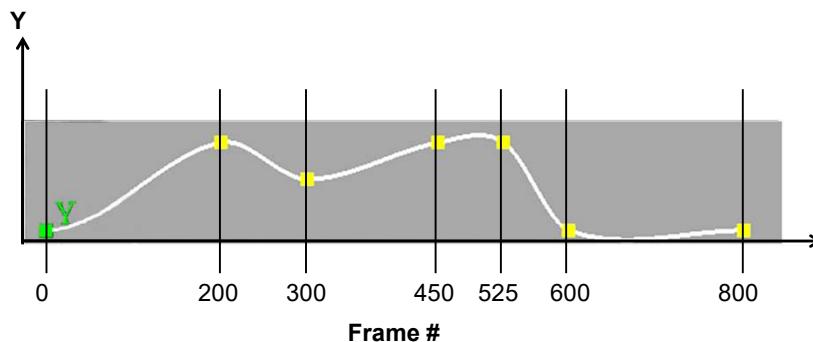

7

**Do This Same Thing for the X, Y, and Z Translations
and the X, Y, and Z Rotations**

X
Y
Z
 θ_x
 θ_y
 θ_z

mjb – September 22, 2023

7

8

Instead of Key Frames, I Like Specifying Key Times Better

We created a C++ class to do the interpolation for you

```
class Keytimes:
    void AddTimeValue( float time, float value );
    float GetFirstTime( );
    float GetLastTime( );
    int GetNumKeytimes( );
    float GetValue( float time );
    void Init( );
    void PrintTimeValues( );
```

Oregon State University Computer Graphics

mjb – September 22, 2023

8

Instead of Key Frames, I Like Specifying Key Times Better

```

Keytimes Xpos;

int
main( int argc, char *argv[] )
{
    Xpos.Init( );
    Xpos.AddTimeValue( 0.0, 0.000 );
    Xpos.AddTimeValue( 2.0, 0.333 );
    Xpos.AddTimeValue( 1.0, 3.142 );
    Xpos.AddTimeValue( 0.5, 2.718 );
    fprintf( stderr, "%d time-value pairs:\n", Xpos.GetNumKeytimes() );
    Xpos.PrintTimeValues( );

    fprintf( stderr, "Time runs from %8.3f to %8.3f\n", Xpos.GetFirstTime( ), Xpos.GetLastTime( ) );

    for( float t = 0.f; t <= 2.f; t += 0.1f )
    {
        float v = Xpos.GetValue( t );
        fprintf( stderr, "%8.3ft%8.3fn", t, v );
    }
}

```



Oregon State

University

Computer Graphics

mjb - September 22, 2023

9

Instead of Key Frames, I Like Specifying Key Times Better


```

( 0.00, 0.000)
( 0.00, 0.000) ( 2.00, 0.333)
( 0.00, 0.000) ( 1.00, 3.142) ( 2.00, 0.333)
( 0.00, 0.000) ( 0.50, 2.718) ( 1.00, 3.142) ( 2.00, 0.333)
4 time-value pairs

```

Time runs from 0.000 to 2.000

0.000	0.000
0.100	0.232
0.200	0.806
0.300	1.535
0.400	2.234
0.500	2.718
0.600	2.989
0.700	3.170
0.800	3.258
0.900	3.250
1.000	3.142
1.100	2.935
1.200	2.646
1.300	2.302
1.400	1.924
1.500	1.539
1.600	1.169
1.700	0.840
1.800	0.574
1.900	0.397
2.000	0.333

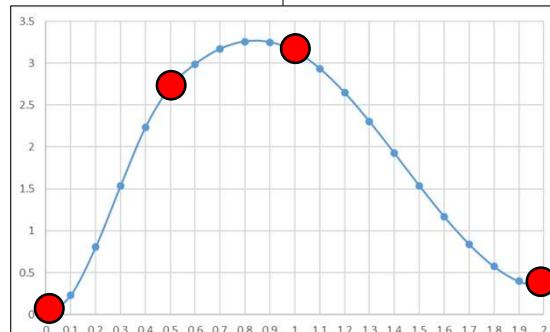

Computer Graphics

mjb - September 22, 2023

10

11

Using the System Clock in Display() for Timing

```

#define MSEC      10000          // i.e., 10 seconds
Keytimes Xpos, Ypos, Zpos;
Keytimes ThetaX, ThetaY, ThetaZ;

// in InitGraphics( ):

<< init the Keytime classes and add the keyframe values >>
...

// in Display( ):

// # msec into the cycle ( 0 - MSEC-1 ):
int msec = glutGet( GLUT_ELAPSED_TIME ) % MSEC;


// turn that into a time in seconds:
float nowSecs = (float)msec / 1000.f;
glPushMatrix( );
    glTranslatef( Xpos.GetValue(nowSecs), Ypos.GetValue(nowSecs), Zpos.GetValue(nowSecs) );
    glRotatef( ThetaX.GetValue(nowSecs), 1., 0., 0. );
    glRotatef( ThetaY.GetValue(nowSecs), 0., 1., 0. );
    glRotatef( ThetaZ.GetValue(nowSecs), 0., 0., 1. );
    << draw the object >>
glPopMatrix( );
}

```

Number of msec in the animation cycle

Computer Graphics

mjb – September 22, 2023



11