




Data Buffers



Oregon State University
Mike Bailey
mjb@cs.oregonstate.edu



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/)



Oregon State University
Computer Graphics


DataBuffers.pptx mjb - December 26, 2022

From the Quick Reference Card

Even though Vulkan is up to 1.3, the most current Vulkan Reference card is version 1.1

Vulkan 1.1 Reference Guide Page 5


Vulkan Pipeline Diagram [9]

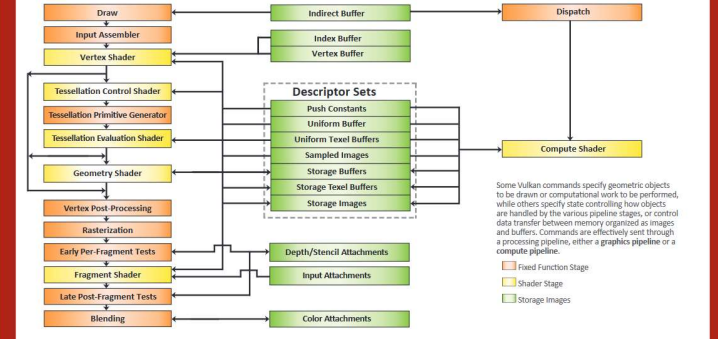

Some Vulkan commands specify geometric objects to be drawn or computational work to be performed, while others specify state controlling how objects are handled by the various pipeline stages, or control data transfer between memory organized as images and buffers. Commands are effectively sent through a processing pipeline, either a graphics pipeline or a compute pipeline.

- █ Fixed Function Stage
- █ Shader Stage
- █ Storage Images

<https://www.khronos.org/files/vulkan11-reference-guide.pdf>



Oregon State University
Computer Graphics

mjb - December 26, 2022

Terminology Issues


A Vulkan **Data Buffer** is just a group of contiguous bytes in GPU memory. They have no inherent meaning. The data that is stored there is whatever you want it to be. (This is sometimes called a "Binary Large Object", or "BLOB".)

It is up to you to be sure that the writer and the reader of the Data Buffer are interpreting the bytes in the same way!

Vulkan calls these things "Buffers". But, Vulkan calls other things "Buffers", too, such as Texture Buffers and Command Buffers. So, I sometimes have taken to calling these things "Data Buffers" and have even gone so far as to extend some of Vulkan's own terminology:

```
typedef VkBuffer      VkDataBuffer;
```


This is probably a bad idea in the long run.




Oregon State University
Computer Graphics

mjb - December 26, 2022

Creating and Filling Vulkan Data Buffers

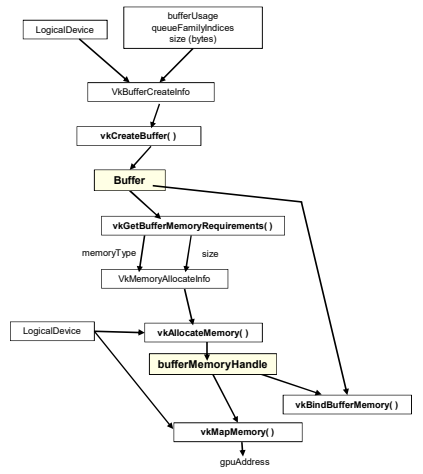



Oregon State University
Computer Graphics

mjb - December 26, 2022

Creating a Vulkan Data Buffer

5

```

VkBuffer Buffer; // or "VkDataBuffer Buffer"

VkBufferCreateInfo vbc;
vbc.sType = VK_STRUCTURE_TYPE_BUFFER_CREATE_INFO;
vbc.pNext = nullptr;
vbc.flags = 0;
vbc.size = << buffer size in bytes >>
vbc.usage = <<"or"ed bits of: >>
    VK_USAGE_TRANSFER_SRC_BIT
    VK_USAGE_TRANSFER_DST_BIT
    VK_USAGE_UNIFORM_TEXEL_BUFFER_BIT
    VK_USAGE_STORAGE_TEXEL_BUFFER_BIT
    VK_USAGE_UNIFORM_BUFFER_BIT
    VK_USAGE_STORAGE_BUFFER_BIT
    VK_USAGE_INDEX_BUFFER_BIT
    VK_USAGE_VERTEX_BUFFER_BIT
    VK_USAGE_INDIRECT_BUFFER_BIT
vbc.sharingMode = << one of: >>
    VK_SHARING_MODE_EXCLUSIVE
    VK_SHARING_MODE_CONCURRENT
vbc.queueFamilyIndexCount = 0;
vbc.pQueueFamilyIndices = (const int32_t) nullptr;

result = vkCreateBuffer ( LogicalDevice, IN &vbc, PALLOCATOR, OUT &Buffer );
    
```

"or" these bits together to specify how this buffer will be used

Oregon State University
Computer Graphics

mjb - December 26, 2022

Allocating Memory for a Vulkan Data Buffer, Binding a Buffer to Memory, and Writing to the Buffer

6

```

VkMemoryRequirements vmr;
result = vkGetBufferMemoryRequirements( LogicalDevice, Buffer, OUT &vmr );

VkMemoryAllocateInfo vmai;
vmai.sType = VK_STRUCTURE_TYPE_MEMORY_ALLOCATE_INFO;
vmai.pNext = nullptr;
vmai.flags = 0;
vmai.allocationSize = vmr.size;
vmai.memoryTypeIndex = FindMemoryThatIsHostVisible( );

...

VkDeviceMemory vdm;
result = vkAllocateMemory( LogicalDevice, IN &vmai, PALLOCATOR, OUT &vdm );

result = vkBindBufferMemory( LogicalDevice, Buffer, IN vdm, 0 ); // 0 is the offset

...

result = vkMapMemory( LogicalDevice, IN vdm, 0, VK_WHOLE_SIZE, 0, &ptr );

<< do the memory copy >>

result = vkUnmapMemory( LogicalDevice, IN vdm );
    
```

Oregon State University
Computer Graphics

mjb - December 26, 2022

Finding the Right Type of Memory

7

```

int FindMemoryThatIsHostVisible( )
{
    VkPhysicalDeviceMemoryProperties vpdmp;
    vkGetPhysicalDeviceMemoryProperties( PhysicalDevice, OUT &vpdmp );
    for( unsigned int i = 0; i < vpdmp.memoryTypeCount; i++ )
    {
        VkMemoryType vmt = vpdmp.memoryTypes[i];
        if( ( vmt.propertyFlags & VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT ) != 0 )
        {
            return i;
        }
    }
    return -1;
}
    
```

Oregon State University
Computer Graphics

mjb - December 26, 2022

Finding the Right Type of Memory

8

```

int FindMemoryThatIsDeviceLocal( )
{
    VkPhysicalDeviceMemoryProperties vpdmp;
    vkGetPhysicalDeviceMemoryProperties( PhysicalDevice, OUT &vpdmp );
    for( unsigned int i = 0; i < vpdmp.memoryTypeCount; i++ )
    {
        VkMemoryType vmt = vpdmp.memoryTypes[i];
        if( ( vmt.propertyFlags & VK_MEMORY_PROPERTY_DEVICE_LOCAL_BIT ) != 0 )
        {
            return i;
        }
    }
    return -1;
}
    
```

Oregon State University
Computer Graphics

mjb - December 26, 2022

Finding the Right Type of Memory

9

```
VkPhysicalDeviceMemoryProperties vpdmp;
vkGetPhysicalDeviceMemoryProperties( PhysicalDevice, OUT &vpdmp );
```

6 Memory Types:

```
Memory 0:
Memory 1: DeviceLocal
Memory 2: HostVisible HostCoherent
Memory 3: HostVisible HostCoherent HostCached
Memory 4: DeviceLocal HostVisible HostCoherent
Memory 5: DeviceLocal
```

4 Memory Heaps:

```
Heap 0: size = 0xdbb00000 DeviceLocal
Heap 1: size = 0xfd504000
Heap 2: size = 0x0d600000 DeviceLocal
Heap 3: size = 0x02000000 DeviceLocal
```

These are the numbers for the Nvidia A6000 cards



mjb - December 26, 2022

Memory-Mapped Copying to GPU Memory, Example I

10

```
void *mappedDataAddr;
vkMapMemory( LogicalDevice, myBuffer.vdm, 0, VK_WHOLE_SIZE, 0, OUT (void *)&mappedDataAddr );
    memcpy( mappedDataAddr, &VertexData, sizeof(VertexData) );
vkUnmapMemory( LogicalDevice, myBuffer.vdm );
```



mjb - December 26, 2022

Memory-Mapped Copying to GPU Memory, Example II

11

```
struct vertex *vp;
vkMapMemory( LogicalDevice, IN myBuffer.vdm, 0, VK_WHOLE_SIZE, 0, OUT (void *)&vp );
for( int i = 0; i < numTrianglesInObjFile; i++ ) // number of triangles
{
    for( int j = 0; j < 3; j++ ) // 3 vertices per triangle
    {
        vp->position = glm::vec3( . . . );
        vp->normal = glm::vec3( . . . );
        vp->color = glm::vec3( . . . );
        vp->texCoord = glm::vec2( . . . );
        vp++;
    }
}
vkUnmapMemory( LogicalDevice, myBuffer.vdm );
```



mjb - December 26, 2022

Sidebar: The Vulkan Memory Allocator (VMA)

12

The **Vulkan Memory Allocator** is a set of functions to simplify your view of allocating buffer memory. I am including its github link here and a little sample code in case you want to take a peek.

<https://github.com/GPUOpen-LibrariesAndSDKs/VulkanMemoryAllocator>

This repository also includes a smattering of documentation.

See our class VMA noteset for more VMA details



mjb - December 26, 2022

Sidebar: The Vulkan Memory Allocator (VMA)


```
#define VMA_IMPLEMENTATION
#include "vk_mem_alloc.h"
...
VkBufferCreateInfo          vbci;
...
VmaAllocationCreateInfo     vaci;
vac_i.physicalDevice = PhysicalDevice;
vac_i.device = LogicalDevice;
vac_i.usage = VMA_MEMORY_USAGE_GPU_ONLY;

VmaAllocator                var;
vmaCreateAllocator( IN &vac_i, OUT &var );
...
VkBuffer                    Buffer;
VmaAllocation               van;
vmaCreateBuffer( IN var, IN &vbci, IN &vac_i, OUT &Buffer, OUT &van, nullptr );
```

```
void *mappedDataAddr;
vmaMapMemory( var, van, OUT &mappedDataAddr );

memcpy( mappedDataAddr, &VertexData, sizeof(VertexData) );

vmaUnmapMemory( var, van );
```



See our class VMA noteset for more VMA details

mjb - December 26, 2022

Something I've Found Useful

I find it handy to encapsulate buffer information in a struct:



```
typedef struct MyBuffer
{
    VkDataBuffer    buffer;
    VkDeviceMemory  vdm;
    VkDeviceSize    size; // in bytes
} MyBuffer;

...

// example:
MyBuffer                MyObjectUniformBuffer;
```

It's the usual object-oriented benefit – you can pass around just one data-item and everyone can access whatever information they need.

It also makes it impossible to accidentally associate the wrong VkDeviceMemory and/or VkDeviceSize with the wrong data buffer.






mjb - December 26, 2022

Initializing a Data Buffer

It's the usual object-oriented benefit – you can pass around just one data-item and everyone can access whatever information they need.

```
VkResult
Init05DataBuffer( VkDeviceSize size, VkBufferUsageFlags usage, OUT MyBuffer * pMyBuffer )
{
    ...
    vbci.size = pMyBuffer->size = size;
    ...
    result = vkCreateBuffer ( LogicalDevice, IN &vbci, PALLOCATOR, OUT &pMyBuffer->buffer );
    ...
    pMyBuffer->vdm = vdm;
    ...
}
```

mjb - December 26, 2022

Here are C/C++ structs used by the Sample Code to hold some uniform variables¹⁶

```
struct sceneBuf
{
    glm::mat4    uProjection;
    glm::mat4    uView;
    glm::mat4    uSceneOrient;
    vec4         uLightPos;
    vec4         uLightColor;
    vec4         uLightKaKdKs;
    float        uTime;
} Scene;

struct objectBuf
{
    glm::mat4    uModel;
    glm::mat4    uNormal;
    vec4         uColor;
    float        uShininess;
} Object;
```

The uNormal is set to:
glm::inverseTranspose(uView * uSceneOrient * uModel)



Here's the associated GLSL shader code to access those uniform variables:

```
layout( std140, set = 1, binding = 0 ) uniform sceneBuf
{
    mat4    uProjection;
    mat4    uView;
    mat4    uSceneOrient;
    vec4    uLightPos;
    vec4    uLightColor;
    vec4    uLightKaKdKs;
    float   uTime;
} Scene;

layout( std140, set = 2, binding = 0 ) uniform objectBuf
{
    mat4    uModel;
    mat4    uNormal;
    vec4    uColor;
    float   uShininess;
} Object;
```

In the vertex shader, each object vertex gets transformed by:
uProjection * uView * uSceneOrient * uModel

In the vertex shader, each surface normal vector gets transformed by the **uNormal**

mjb - December 26, 2022

Filling those Uniform Variables

17

```

const float EYEDIST = 3.0f;
const double FOV = glm::radians(60.); // field-of-view angle in radians

glm::vec3 eye(0.,0.,EYEDIST);
glm::vec3 look(0.,0.,0.);
glm::vec3 up(0.,1.,0.);


Scene.uProjection = glm::perspective( FOV, (double)Width/(double)Height, 0.1, 1000. );
Scene.uProjection[1][1] *= -1.; // account for Vulkan's LH screen coordinate system
Scene.uView = glm::lookAt( eye, look, up );
Scene.uSceneOrient = glm::mat4( 1. );

Object.uModelOrient = glm::mat4( 1. ); // identity
Object.uNormal = glm::inverseTranspose( Scene.uView * Scene.uSceneOrient * Object.uModel )
    
```

This code assumes that this line:

```
#define GLM_FORCE_RADIANS
```

is listed before GLM is #included!



Oregon State University
Computer Graphics

mb - December 26, 2022

The Parade of Buffer Data

18

MyBuffer MyObjectUniformBuffer;

The MyBuffer does not hold any actual data itself. It just information about what is in the data buffer

```

VkResult
Init05DataBuffer( VkDeviceSize size, VkBufferUsageFlags usage, OUT MyBuffer * pMyBuffer )
{
    ...
    vbci.size = pMyBuffer->size = size;
    ...
    result = vkCreateBuffer( LogicalDevice, IN &vbci, PALLOCATOR, OUT &pMyBuffer->buffer );
    ...
    pMyBuffer->vdm = vdm;
    ...
}
    
```

This C struct is holding the original data, written by the application.


Memory-mapped copy operation

The Data Buffer in GPU memory is holding the copied data. It is readable by the shaders

```

struct objectBuf Object;
{
    Object.uModelOrient = glm::mat4( 1. ); // identity
    Object.uNormal = glm::inverseTranspose( Scene.uView * Scene.uSceneOrient * Object.uModel )
}

uniform objectBuf Object;
layout( std140, set = 2, binding = 0 ) uniform objectBuf
{
    mat4 uModel;
    mat4 uNormal;
    vec4 uColor;
    float uShininess;
} Object;
    
```



Oregon State University
Computer Graphics

mb - December 26, 2022

Filling the Data Buffer

19

```

typedef struct MyBuffer
{
    VkDataBuffer buffer;
    VkDeviceMemory vdm;
    VkDeviceSize size; // in bytes
} MyBuffer;
    
```


// example:
MyBuffer MyObjectUniformBuffer;

```

Init05UniformBuffer( sizeof(Object), OUT &MyObjectUniformBuffer );
Fill05DataBuffer( MyObjectUniformBuffer, IN (void *) &Object );
    
```

```

struct objectBuf
{
    glm::mat4 uModel;
    glm::mat4 uNormal;
    vec4 uColor;
    float uShininess;
} Object;
    
```



Oregon State University
Computer Graphics

mb - December 26, 2022

Creating and Filling the Data Buffer – the Details

20

```


VkResult
Init05DataBuffer( VkDeviceSize size, VkBufferUsageFlags usage, OUT MyBuffer * pMyBuffer )
{
    VkResult result = VK_SUCCESS;
    VkBufferCreateInfo vbci;
    vbci.sType = VK_STRUCTURE_TYPE_BUFFER_CREATE_INFO;
    vbci.pNext = nullptr;
    vbci.flags = 0;
    vbci.size = pMyBuffer->size = size;
    vbci.usage = usage;
    vbci.sharingMode = VK_SHARING_MODE_EXCLUSIVE;
    vbci.queueFamilyIndexCount = 0;
    vbci.pQueueFamilyIndices = (const uint32_t *) nullptr;
    result = vkCreateBuffer( LogicalDevice, IN &vbci, PALLOCATOR, OUT &pMyBuffer->buffer );

    VkMemoryRequirements vmr;
    vkGetBufferMemoryRequirements( LogicalDevice, IN pMyBuffer->buffer, OUT &vmr ); // fills vmr

    VkMemoryAllocateInfo vmai;
    vmai.sType = VK_STRUCTURE_TYPE_MEMORY_ALLOCATE_INFO;
    vmai.pNext = nullptr;
    vmai.allocationSize = vmr.size;
    vmai.memoryTypeIndex = FindMemoryThatIsHostVisible();

    VkDeviceMemory vdm;
    result = vkAllocateMemory( LogicalDevice, IN &vmai, PALLOCATOR, OUT &vdm );
    pMyBuffer->vdm = vdm;

    result = vkBindBufferMemory( LogicalDevice, pMyBuffer->buffer, IN vdm, OFFSET_ZERO );
    return result;
}
    
```



Oregon State University
Computer Graphics

mb - December 26, 2022

Creating and Filling the Data Buffer – the Details

21

```
VkResult  
Fill05DataBuffer( IN MyBuffer myBuffer, IN void * data )  
{  
    // the size of the data had better match the size that was used to Init the buffer!  
  
    void * pGpuMemory;  
    vkMapMemory( LogicalDevice, IN myBuffer.vdm, 0, VK_WHOLE_SIZE, 0, 0, &pGpuMemory );  
    memcpy( pGpuMemory, data, (size_t)myBuffer.size );  
  
    vkUnmapMemory( LogicalDevice, IN myBuffer.vdm );  
    return VK_SUCCESS;  
}
```

Remember – to Vulkan and GPU memory, these are just *bits*. It is up to *you* to handle their meaning correctly.

